

Apkures akumulācijas tvertnes bez emaljas


SV/SVW




B
200, 200.1, 300.2,
500.1 litri

C
Citi tilpumi

5 gadu*
garantija

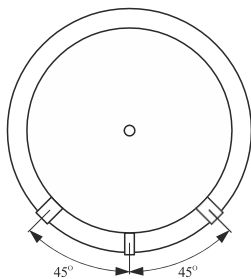

Piemēroti siltuma akumulēšanai no vairākiem avotiem, piemēram, no diviem apkures katliem un solārās sistēmas

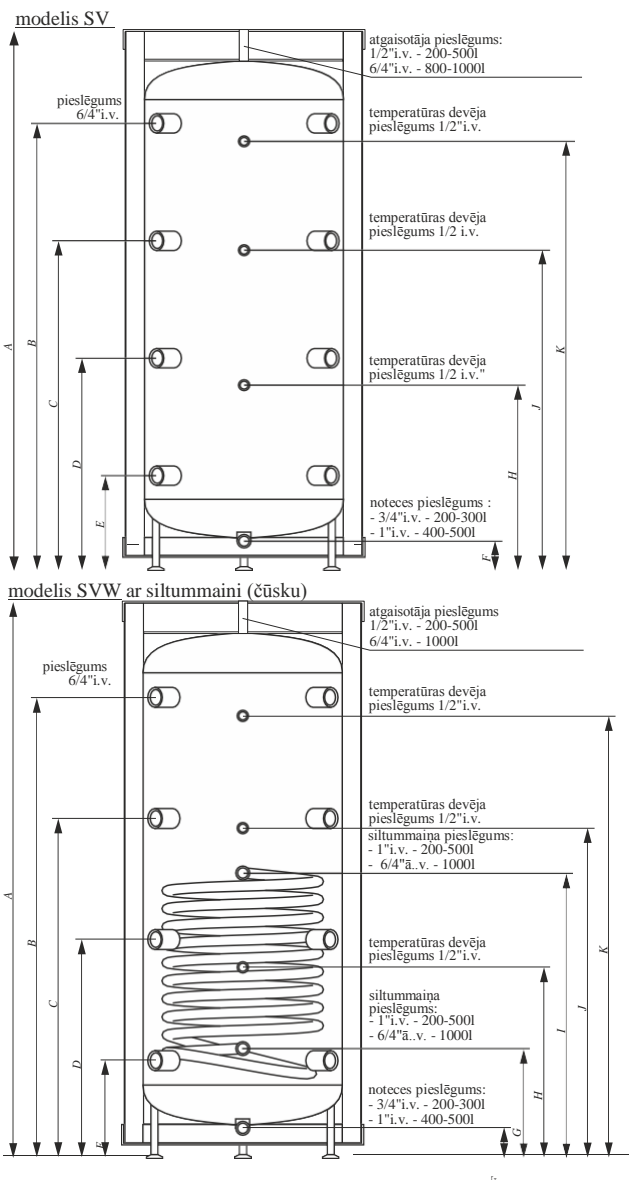

	Diametrs (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	K (mm)
SV-200/200.1	595	1616	1322	970	618	266	125	-	554	-	911	1239
SV-300/300.2	692	1596	1338	973	611	249	126	-	544	-	940	1249
SV-400.1	755	1643	1368	996	626	256	124	-	550	-	947	1278
SV-500/500.1	854	1761	1446	1051	656	261	130	-	629	-	1064	1379
SV-800.1	950	1900	1566	1142	718	294	-	-	691	-	1099	1539
SV-1000.1	950	2230	1895	1362	828	294	-	-	801	-	1379	1869
SVW-200	595	1616	1322	970	618	266	125	256	554	811	911	1239
SVW-300	692	1596	1338	973	611	249	126	239	544	850	940	1249
SVW-400.1	755	1643	1368	996	626	256	124	246	550	856	947	1278
SVW-500	854	1761	1446	1051	656	261	130	251	629	974	1064	1379
SVW-800.1	994	1900	1566	1142	718	294	160	293	691	1182	1099	1539
SVW-1000.1	994	2230	1895	1362	828	294	160	293	801	1294	1379	1869

Tehniskie dati

Modelis	Tilpums (l)	Siltummaiņa (čūskas) laukums (m ²)	Nominālais spiediens (tvertnē / siltummaiņā) (MPa)	Izolācijas biežums / materiāls*** (mm)	Siltuma zudumi** (W)
SV-200 (SV-200.1)	210 (220)	-	0,6 / - (0,3 / -)	65/PUR/NR	59 (53)
SV-300 (SV-300.2)	307 (324)	-	0,6 / - (0,3 / -)	67/EPS/R	92 (65)
SV-400.1	399	-	0,3 / -	72/EPS/R	87
SV-500 (SV-500.1)	485 (493)	-	0,6 / - (0,3 / -)	100/EPS/R	83 (78)
SV-800.1	807	-	0,3 / -	100/WPOL/R	120
SV-1000.1	967	-	0,3 / -	100/WPOL/R	127
SVW-200	204	0,75	0,6 / 1,0	65/PUR/NR	59
SVW-300	300	1,5	0,6 / 1,0	67/EPS/R	96
SVW-400.1	395	1,7	0,3 / 1,0	72/EPS/R	98
SVW-500	465	2,25	0,6 / 1,0	100/EPS/R	82
SVW-800.1	780	3,0	0,3 / 1,0	100/WPOL/R	121
SVW-1000.1	936	3,5	0,3 / 1,0	100/WPOL/R	128

* Detalizēti garantijas nosacījumi ir aprakstīti garantijas kartē. 5-gadu garantija attiecas uz tvertnēm līdz 500 litriem, virs 500l - 3 gadu garantija (modeļiem ...1(2) 8 gadu garantija)

** Saskaņā ar EU komisijas lēmumu nr. 812/2013, 814/2013

*** Izolācija: R - demontējama, NR - nedemontējama